


NOMOS GLASHÜTTE

Data sheet Zürich world time

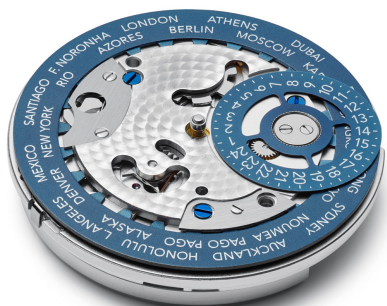

CASE

stainless steel, tripartite
sapphire crystal glass back
fixed with six screws

GLASS

domed sapphire crystal
with anti-reflective coating
inside and out

WINDING

automatic

DIMENSIONS

diameter 39.9 mm
height 10.9 mm

WATER RESISTANCE

up to 3 atm
(splash-proof)

CALIBER

DUW 5201—in-house built
NOMOS caliber with
automatic winding,
worldtime and 24-hour
indicator

MOVEMENT HEIGHT

5.7 mm

DIAMETER

13 $\frac{3}{4}$ lines (31 mm)

POWER RESERVE

up to 42 hours

DIAL

galvanized, white, with
world time and 24-hour
indicator

HANDS

rhodium-plated, faceted

STRAP

Horween Genuine Shell
Cordovan black
lug width 20 mm

REFERENCE

805

SPECIAL QUALITIES

worldtime mechanism
NOMOS swing system
tempered blue balance
spring
stop-seconds mechanism
Glashütte stopwork
bidirectional winding rotor
Glashütte three-quarter
plate
adjusted in six positions
26 jewels
tempered blue screws
rhodium-plated surfaces
with Glashütte ribbing and
NOMOS perlage
ratchet and duplex wheel
with Glashütte sunburst